





For more than 20 years **Mayco Industries**, a fully owned subsidiary of **Metalico Incorporated** has served the stained glass industry with a high quality lead came known for its consistency and workability. We have strived to meet any special requirements and our original 15 sizes has increased to over 100. This brochure is intended to answer all questions about size, shapes, weights, alloys and packaging. However if you have any additional questions, please call or write.

PROFILES AND SPECIFICATIONS

- Profiles shown are drawn as close as possible to the actual shape and size of the lead types
- Dimensions are listed with the **nearest** fraction followed by the **actual** decimal. Decimal equivalents are as follows:

1/32" = .031	5/32" = .156	1/4" = .250	7/16" = .438
3/32" = .094	3/16" = .188	9/32" = .281	1/2" = .500
1/8" = .125	13/64" = .203	5/16" = .313	5/8" = .625
9/64" = .141	7/32" = .219	3/8" = .375	3/4" = .750

- Definitions of Came Lead parts are as follows:

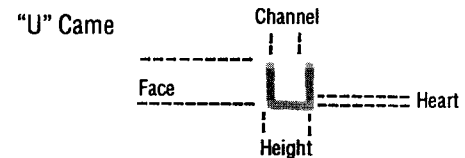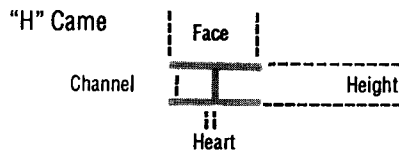

- Alloys

1. Soft (99.7% pure lead)
2. Semi-soft (.15%-.40% antimony/balance lead)
3. Regular (.75% - 1.0% antimony/balance lead)
4. Hard (1½%-2% antimony/balance lead)
5. Brite (1½%-2% antimony/1½% tin/balance lead)

- Packaging


















1. 100 lb. cartons – 6 ft. lengths
2. 50 lb. cartons – 6 ft. lengths
3. 33 lb. cartons – 6 ft. lengths
4. 24 lb. spools – packed in cartons
5. 12 lb. spools – packed in cartons

ROUND "H" SIZES
















SOLDER – 50/50, 60/40, 63/37 and Lead Free Available

	Item No.	Face Width	Channel Width	Heart Thickness	Height	Approx. oz./ft.
I	PH314	3/32" - .102	9/64" - .138	.025	.243	.79
I	PH315 (56A)	3/32" - .102	5/32" - .154	.031	.242	1.17
I	PH312	1/8" - .124	9/64" - .145	.030	.250	1.11
I	26A	1/8" - .125	9/64" - .148	.031	.254	1.25
I	PH301	9/64" - .140	5/32" - .153	.028	.262	1.17
I	16A	9/64" - .142	5/32" - .154	.031	.262	1.32
I	21A	9/64" - .146	3/16" - .187	.030	.332	1.75
I	PH313	9/64" - .147	13/64" - .198	.031	.290	1.24
I	600A	5/32" - .154	5/32" - .154	.031	.264	1.40




ROUND "H" SIZES (Continued)

	Item No.	Face Width	Channel Width	Heart Thickness	Height	Approx. oz./ft.
	86A	3/16" - .180	9/64" - .148	.032	.256	1.54
	PH310	3/16" - .180	9/64" - .146	.025	.240	1.31
	PH311	3/16" - .180	13/64" - .198	.026	.290	1.47
	111A	3/16" - .182	5/32" - .150	.036	.300	2.02
	25A	3/16" - .182	5/32" - .154	.034	.330	2.35
	PH308	3/16" - .184	9/64" - .146	.025	.250	1.43
	RH102	3/16" - .184	5/32" - .153	.034	.240	1.46
	23A	3/16" - .184	13/64" - .194	.028	.298	1.63
	06A	3/16" - .185	9/64" - .148	.028	.258	1.57
	RH103	3/16" - .185	9/64" - .140	.031	.240	1.71
	22A	3/16" - .188	5/32" - .156	.034	.254	1.62
	RH110	3/16" - .188	3/16" - .188	.040	.345	2.42
	PH325	13/64" - .206	3/16" - .172	.025	.270	1.66
	RH104	13/64" - .205	3/16" - .172	.035	.276	1.86
	564A	13/64" - .210	3/16" - .174	.028	.284	1.90
	88A	7/32" - .212	5/32" - .154	.031	.248	1.80
	RH105	7/32" - .216	9/64" - .149	.036	.238	1.81
	RH106	7/32" - .218	9/64" - .148	.040	.288	2.47
	52A	7/32" - .218	5/32" - .152	.035	.258	2.05
	90A	7/32" - .215	3/16" - .190	.036	.322	2.30
	80A	7/32" - .220	5/32" - .156	.028	.236	1.40













ROUND "H" SIZES (Continued)

	Item No.	Face Width	Channel Width	Heart Thickness	Height	Approx. oz./ft.
	PH360	7/32" - .230	7/32" - .230	.030	.258	1.70
	PH370	7/32" - .230	5/16" - .310	.032	.495	1.90
	PH309	1/4" - .233	3/16" - .171	.032	.260	1.70
	96A	1/4" - .233	3/16" - .169	.031	.273	1.99
	PH350	1/4" - .239	3/16" - .174	.027	.272	1.73
	85A	1/4" - .240	3/16" - .193	.057	.299	2.04
	96A-3	1/4" - .248	3/16" - .176	.046	.288	2.10
	RH108	1/4" - .248	5/32" - .154	.034	.250	1.99
	72A (RH107)	1/4" - .250	3/16" - .184	.032	.280	2.13
	962A	1/4" - .250	3/16" - .192	.031	.300	2.22
	PH319	1/4" - .250	3/16" - .195	.029	2.55	1.70
	66A	5/16" - .322	3/16" - .190	.044	.310	3.07
	PH306	5/16" - .325	3/16" - .186	.047	.300	2.80
	PH307	5/16" - .320	7/32" - .234	.047	.346	2.90
	696A	3/8" - .389	3/16" - .196	.042	.306	.310

FLAT "H" SIZES (Continued)

	60A	3/16" - .185	5/32" - .155	.029	.215	1.19
	25S	1/4" - .250	13/64" - .196	.036	.274	2.05
	25SN	1/4" - .250	5/32" - .158	.036	.238	1.78


















FLAT "H" SIZES (Continued)

	Item No.	Face Width	Channel Width	Heart Thickness	Height	Approx. oz./ft.
	SH204 (44S)	5/16" - .309	13/64" - .200	.035	.280	2.51
	SH205 (54S)	5/16" - .312	1/4" - .256	.036	.330	2.47
	SH203	5/16" - .312	5/32" - .160	.035	.214	1.75
	34S	5/16" - .312	5/32" - .158	.036	.236	2.29
	82S	3/8" - .361	5/32" - .183	.051	.262	2.35
	46S	3/8" - .372	5/32" - .156	.037	.228	2.56
	SH207	3/8" - .373	13/64" - .200	.032	.264	2.38
	74S	3/8" - .375	13/64" - .202	.036	.278	3.17
	SH703	7/16" - .440	5/32" - .155	.050	.225	2.86
	20S	1/2" - .496	9/64" - .139	.047	.214	3.25
	SH206	1/2" - .480	5/32" - .160	.030	.221	2.90
	94S	1/2" - .492	13/64" - .196	.050	.300	4.59
	SH209	1/2" - .500	13/64" - .200	.032	.264	2.93
	97S	5/8" - .625	13/64" - .200	.035	.270	3.60
	99S	3/4" - .740	7/32" - .230	.030	.298	4.30


FLAT "U" SIZES

	FU406	3/32" - .076	1/8" - .129	.035	.210	.80
	68Y	3/32" - .080	1/8" - .128	.032	.224	.85
	FU421	3/32" - .084	9/64" - .140	.030	.220	.83
	FU401	3/32" - .084	5/32" - .150	.032	.242	.92

FLAT "U" SIZES (Continued)

	Item No.	Face Width	Channel Width	Heart Thickness	Height	Approx. oz./ft.
	18Y	3/32" - .088	5/32" - .152	.032	.252	.97
	92Y	3/32" - .090	5/32" - .160	.043	.225	.89
	FU400	3/32" - .094	9/64" - .147	.045	.230	1.12
	FU409	3/32" - .098	5/32" - .150	.034	.245	.96
	FU404	3/32" - .100	9/64" - .146	.033	.225	.99
	48Y	3/32" - .106	9/64" - .148	.032	.252	1.10
	88Y	3/32" - .106	5/32" - .152	.042	.282	1.30
	FU407	1/8" - .112	5/32" - .165	.060	.276	1.70
	KC20	1/8" - .114	3/16" - .176	.050	.290	1.71
	78Y	1/8" - .116	5/32" - .154	.056	.274	1.58
	SU600	1/8" - .116	5/32" - .156	.033	.220	.94
	SU602	1/8" - .128	5/32" - .171	.038	.253	1.36
	KC21	9/64" - .135	13/64" - .203	.046	.303	1.59
	707Y	9/64" - .135	9/64" - .144	.044	.244	1.16
	KC22	3/16" - .186	1/8" - .125	.031	.190	1.11
	SU603	7/32" - .230	5/32" - .170	.029	.232	1.52
	SU702	1/4" - .250	5/32" - .153	.037	.232	2.00

ROUND "U" SIZES

	RU500	9/64" - .148	3/16" - .186	.078	.290	1.85
---	-------	--------------	--------------	------	------	------

ROUND "U" SIZES (Continued)

	Item No.	Face Width	Channel Width	Heart Thickness	Height	Approx. oz./ft.
	RU501	5/32" - .154	5/32" - .153	.067	.243	1.69
	RU503	5/32" - .156	9/64" - .138	.047	.230	1.37
	RU526	3/16" - .175	1/4" - .250	.075	.320	1.95
	RU502	3/16" - .175	5/32" - .152	.075	.219	1.48
	20Y	3/16" = .180	5/32" - .154	.094	.236	1.74
	CS710	1/4" - .254	3/16" - .187	.085	.288	2.50
	95Y	1/4" - .265	3/16" - .176	.055	.305	2.10
	RU525	5/16" - .320	1/4" - .250	.153	.320	3.80

"CUSTOM" SIZES

	65C	7/32" - .210	3/16" - .185	.031	.420	2.50
	9C	7/32" - .214	5/32" - .158	.030	.484	3.72
	10C	7/32" - .214	3/16" - .188	.030	.510	3.80
	BA5	N/A	3/16" - .170	N/A	.300	3.50
	CS701(12C)	N/A	3/16" - .181	N/A	.292	3.65
	27C	3/8" - .370	3/16" - .186	N/A	.264	5.33
	CS729(11C)	3/8" - .375	3/16" - .178	N/A	.271	5.79
	75C	N/A	3/16" - .193	.044	.246	3.62

SOLDER – 50/50, 60/40, 63/37 and Lead Free Available

SAFETY PRECAUTIONS – Wash hands thoroughly after use and remember lead and solder are completely recyclable. Dispose of properly.